


Refrigerated

20' x 8' x 8'6"



		Aluminium	
		Millimetres	Feet
Internal Dimensions	Length	5.455	17'11"
	Width	2.294	7'6,2"
	Height (Nominal)	2.288	7'6"
	Height (Usable)	2.188	7'2"
Door Opening	Width	2.268	7'5,3"
	Height	2.215	7'3,1"
		Kilograms	Pounds
Weight	Max 34,000Gross	24.000	52.800
	Tare	2.950	6.503
	Max Payload	21.050	46.407
		Cube Metres	Cube Feet
Internal Capacity	Nominal	28,6	1.010
	Usable	27,4	967
		MGSS	
		Millimetres	Feet
Internal Dimensions	Length	5.461	17'11,2"
	Width	2.290	7'6"
	Height (Nominal)	2.288	7'6"
	Height (Usable)	2.288	7'6"
Door Opening	Width	2.294	7'6,2"
	Height	2.278	7'5,5"
		Kilograms	Pounds
Weight	Max 34,000Gross	30.480	67.200
	Tare	3.190	7.033
	Max Payload	27.290	60.167
		Cube Metres	Cube Feet
Internal Capacity	Nominal	28,6	1.010
	Usable	27,3	967

40' x 8' x 9'6"

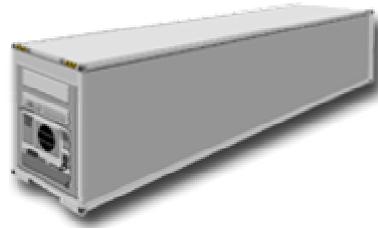

		Aluminium	
		Millimetres	Feet
Internal Dimensions	Length	11.569	37'11,4"
	Width	2.294	7'6,2"
	Height (Nominal)	2.540	8'4"
Door Opening	Height (Usable)	2.440	8'
	Width	2.294	7'6,2"
	Height	2.558	8'4,7"
		Kilograms	Pounds
Weight (Max Gross Weight 34 Tonne)	Max Gross	34.000	74.961
	Tare	4.430	9.767
	Max Payload	29.570	65.194
Weight (Max Gross Weight 30 Tonne)	Max Gross	30.480	67.200
	Tare	4.420	9.750
	Max Payload	26.060	57.450
		Cube Metres	Cube Feet
Internal Capacity	Nominal	67,4	2.380
	Usable	64,8	2.289
		MGSS	
		Millimetres	Feet
Internal Dimensions	Length	11.559	37'11"
	Width	2.290	7'6"
	Height (Nominal)	2.546	8'4,2"
Door Opening	Height (Usable)	2.446	8'0,2"
	Width	2.294	7'6,2"
	Height	2.558	8'4,7"
		Kilograms	Pounds
Weight	Max 34,000Gross	32.000	70.551
	Tare	4.545	10.020
	Max Payload	27.455	60.531
		Cube Metres	Cube Feet
Internal Capacity	Nominal	67,4	2.380
	Usable	64,8	2.298